


# ElementFree45 Typical Installation Diagram

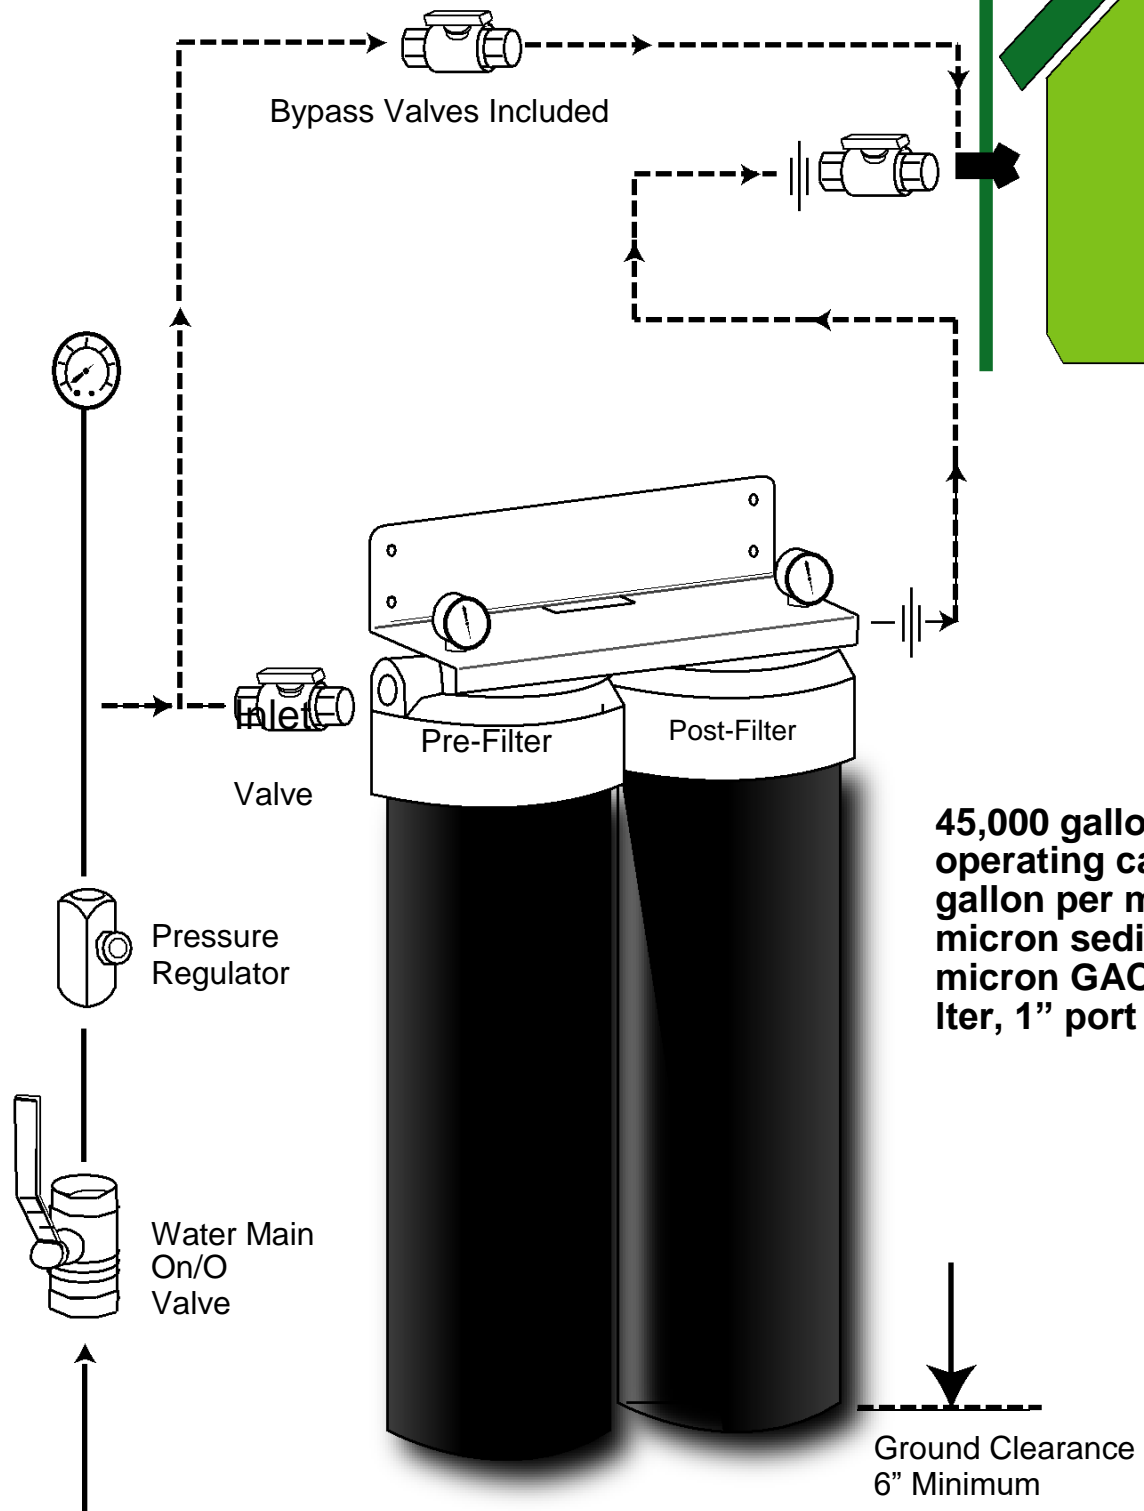

**45,000 gallon recommended operating capacity, 6-25 gallon per minute ow rate, 5-micron sediment pre - lter, 5-micron GAC and KDF post lter, 1" port connection**

Potable Water Line  
Into Home / Business Supply  
Line Typically @65 psi